




EMERGENCY POWER SOLUTIONS: 33 - 850 kVA

Engine Model	Electric Power		Open frame				Sound attenuated			
	Standby Application	Prime Application	Dimensions (mm) - Weight (kg)				Dimensions (mm) - Weight (kg)			
	[kVA]	[kVA]	L	I	H	[kg]	L	I	H	[kg]
C3.3	33 _(GC)	30	1540	970	1361	976	2120	970	1685	1252
	50 _(GC)	45	1925	1120	1361	1056	2300	1120	1685	1588
	55 _(GC)	50	2278	900	1332	902	2298	964	1404	1031
	65 _(GC)	60	1925	1120	1361	1072	2300	1120	1685	1686
C4.4	65	60	1925	1120	1361	1256	2300	1120	1685	1786
	88 _(GC)	80	1925	1120	1361	1256	2300	1120	1685	1786
	110 _(GC)	100	2089	1120	1375	1358	2770	1120	1685	1961
C7.1	150 _(GC)	135	2500	1120	1430	1829	3520	1120	1815	2319
	165 _(GC)	150	2500	1120	1528	1927	3520	1120	1975	2507
	175	160	2500	1120	1528	1927	3520	1120	1975	2507
	200 _(GC)	180	2500	1320	1626	2072	3520	1320	1975	2518
	220 _(GC)	200	2500	1320	1626	2112	3520	1320	1975	2736
C9	250	230	2662	1030	1754	2096	3483	1200	2217	3385
	275	250	2662	1030	1754	2110	3483	1200	2217	3429
	300	275	3300	1100	2110	2426	4300	1410	2165	3276
	330	300	3300	1100	2110	2426	4300	1410	2165	3276
	400 _{GC}	350	2662	1120	1766	2300	3946	1400	2004	2849
C13	400	350	3800	1130	2156	3584	4930	1658	2367	6127
	450 _(GC)	400	3800	1130	2156	3584	4930	1658	2367	6127
	500 _{GC}	450	3100	1338	2168	2924	4773	1630	2357	3774
	550 _{GC}	500	3100	1338	2168	3036	4773	1630	2357	3886
C15	500	450	3800	1130	2215	3734	4930	1658	2367	6248
	550	500	3800	1130	2215	3853	4930	1658	2367	6298
	605 _{GC}	550	3328	1540	2187	3683	4990	1865	2285	4608
	660 _{GC}	600	3328	1540	2187	3794	4990	1865	2285	4719
	715 _{GC}	650	3328	1540	2187	3907	4990	1865	2285	4832
C18	605	550	3900	1461	2155	4217	5320	1920	2289	6686
	660	600	3900	1461	2155	4322	5320	1920	2289	6801
	715	650	3900	1461	2155	4372	5320	1920	2289	6841
	780	706	4130	1689	2570	4532	5572	2170	2398	7478
	850	770	4130	1689	2570	4532	5572	2170	2398	7548

Dimensions and weight for reference only – please contact us for site specific calculation and installation design.

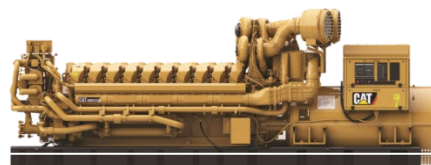



WE POWER YOUR PROJECT



Version : 29/04/2024



EMERGENCY POWER SOLUTIONS: 1100 - 4000 kVA

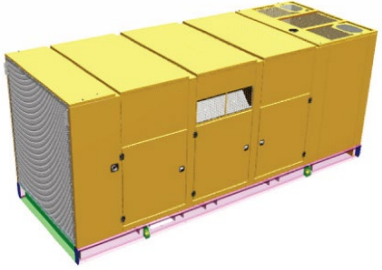Engine Model	Electric Power		Open frame				Sound attenuated			
	Standby Application	Prime Application	Dimensions (mm) en Weight (kg)				Dimensions (mm) - Weight (kg) & Noise Attenuation			
	[kVA]	[kVA]	L	I	H	[kg]	L	I	H	[kg]
C32 <small>ATAAC</small>	1100-1500 <small>GC</small>	-	4175	1856	2218	6.749	5820 6195	2190 2423	2535 2660	+3180 +3.662
	1100	1000	4639	1684	2162	6.668				
	1250	1100	4639	1684	2162	6.985				
	1400	1275	4856	2253	2252	7.600				
	1500	1375	4856	2253	2252	7.600				
1500	1360	4350	1596	2207	11.700					
3512B	1600					1500				
3512B HD	1750	1600	4571	1988	2041	11.750				
	1875	1700								
3516B	2250	2000	5118	1576	2206	14.200	Customized container solutions			
3516B HD	2500	2275	5427	1629	2205	15.970				
3516C HD <small>ATAAC</small>	2750	2500	7542	2569	3096	18.620				
3516E	3000	2725	7685	2612	3342	20.400				
3516E <small>w/o radiator</small>	3100	2850	5624	1887	2151	17.100				
3516EHPD <small>ATAAC</small>	3250	2950	7685	2612	3342	20.400				
3516EHPD <small>ATAAC</small>	3500	3175	7785	2612	3342	20.700				
C175-20	3900	3500	8402	3247	3827	30.000				
C175-20 <small>w/o radiator</small>	4000	3600	6500	2090	2208	25.000				

Generators are available in low and medium voltage.
 Dimensions and weight for reference only – please contact us for site specific calculation and installation design.


ENERIA, Division of BERGERAT MONNOYEUR NV SA
 Brusselsesteenweg 340 – 3090 OVERIJSE

Electric Power Diesel Gensets & UPS systems

Stéphane YERNAUX – Sales and Account Manager – +32 (0)476 25 10 09 - email: syernaux@eneria.be
 Emmanuel DU FOUR – Account Manager – +32 (0)484 63 00 39 - email: edufour@eneria.be
 William DIAS – Account Manager – +32 (0)490 51 35 07 – email: wdias@eneria.be

Cogeneration Gas and Biogas Gensets :

Erik DEVIS – Account Manager – +32 (0)475 52 61 23 - email: edevis@eneria.be

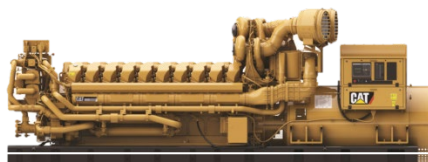

WE POWER YOUR PROJECT

